

LED SOLAR FLOOD LIGHT RANGE



PRODUCT DETAILS



MADPLS-FL50W-6K/G/S



MADPLS-FL100W-6K/G/S




MADPLS-FL150W-6K/G/S

Key Features


- Solar LED Flood light
- No AC power cables, no electrical charges
- Polycrystalline Solar panel
- Lithium battery, Remote control
- Build-in Motion sensor
- Build-in dusk to dawn sensor




MODEL NUMBER	Watts	Materials	LED CHIPS	LED Q'ty (pcs)	LUMENS	CCT	Solar Panel	Battery	Charging Time	Discharging Time	CRI	DIMMABLE	Warranty
MADPLS-FL50W-6K/G/S	50W	ABS	SMD5730	60	6000lm	6K	6V 5.5W	3.2V 12Ah	6-8 Hours	10-12 Hours	> 80	Yes	3 years
MADPLS-FL100W-6K/G/S	100W	ABS	SMD5730	120	12000lm	6K	6V 8.5W	3.2V 18Ah	6-8 Hours	10-12 Hours	> 80	Yes	3 years
MADPLS-FL150W-6K/G/S	150W	ABS	SMD5730	180	18000lm	6K	6V 11.5W	3.2V 24Ah	6-8 Hours	10-12 Hours	> 80	Yes	3 years
MADPLS-RC	Remote controller for LED solar street light, batten light and Flood light.												

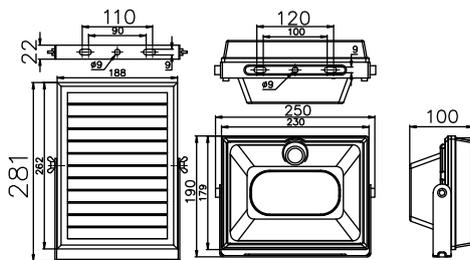

MADPLS-FL50W-6K/G/S

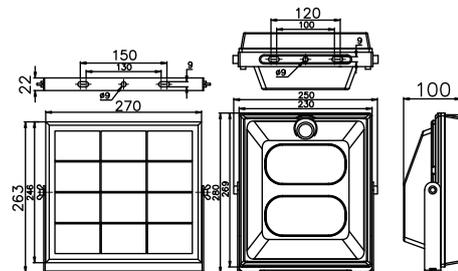

MADPLS-FL100W-6K/G/S

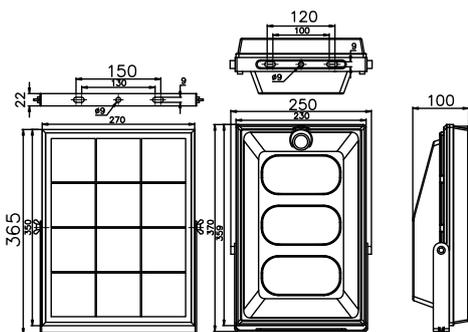

MADPLS-FL150W-6K/G/S



MADPLS-RC

REMOTE CONTROLLER INSTRUCTION

Mode button:

Mode 1: Motion sensor mode, starts with 100% lumen output then standby 30% lumen output if no motion after dusk.

Mode 2: Constant 100% brightness after dusk.

4H & 6H button: Hours lasting for 100% brightness after dusk, then turns off.

ON button: The light is on with mode 1.

OFF button: The light turns off.